

UTILITY BARS



EW3420 UTILITY BAR 50" Spot/Flood Combination

ECCO's combination utility bar utilizes exclusive optics to combine a high-intensity Safety Director™ with the powerful illumination output of a worklight. Steady-burn amber mode is ideal for inclement weather and high-dust environments. Brackets included for front- or rear-vehicle mounting. Features include a weather-protected controller connection 12-24 VDC operation, 5-watt LEDs, aluminum housing, polycarbonate lens, and 3 year warranty.


Features and Benefits

- Custom optics designed for dual-light operation
- Steady burn amber mode
- Flood light with Safety Director™
- Dual-mounting options
- IP67 Rated
- SAE Class 1, CA T13

Models


PART NO.	VOLTAGE	AMPS	LENGTH	CANDELA	BEAM DISTANCE
EW3420	12-24	10 A (steady burn white)	50.2"	36,695 (white)	1250 ft.
		5 A (steady burn amber)		6500 (amber)	381 ft.

Flash Patterns

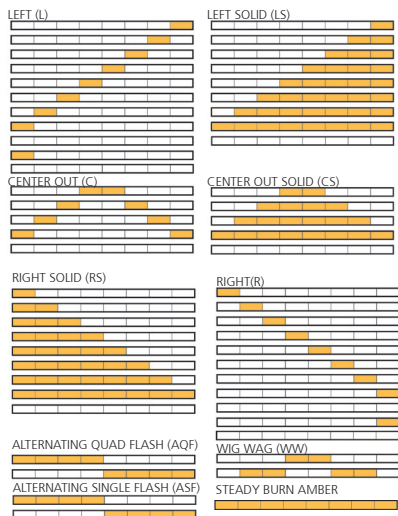

Accessories

- ER3420CB - Replacement combination lightbar controller box
- ER3420MK - Replacement mounting kit for combination utility bar
- EZ3420-CBL - 15' Extension harness and cable for EW3420

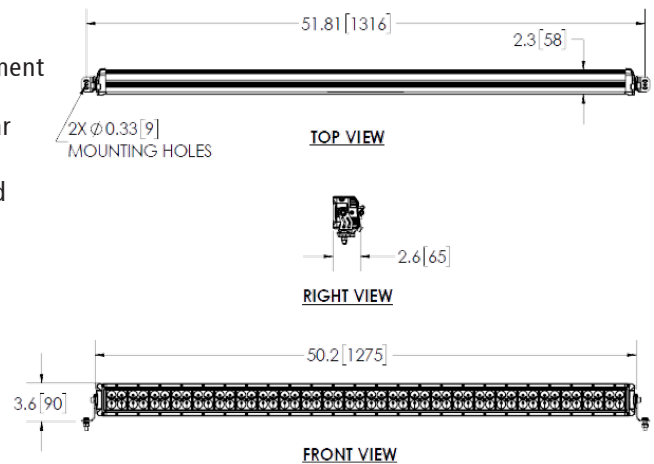

T 800-635-5900 | orders@eccogroup.com